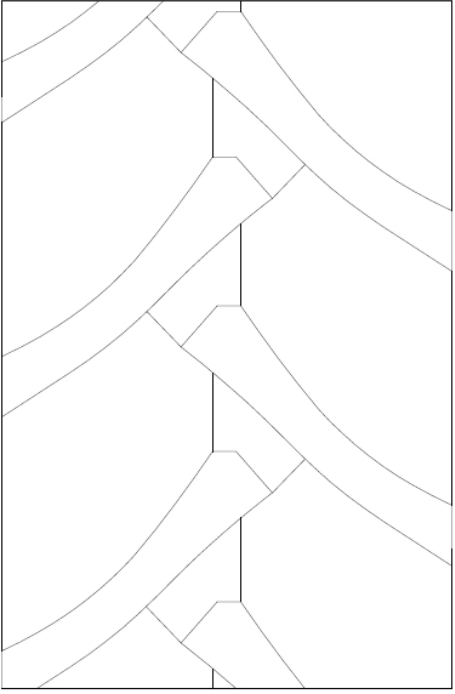
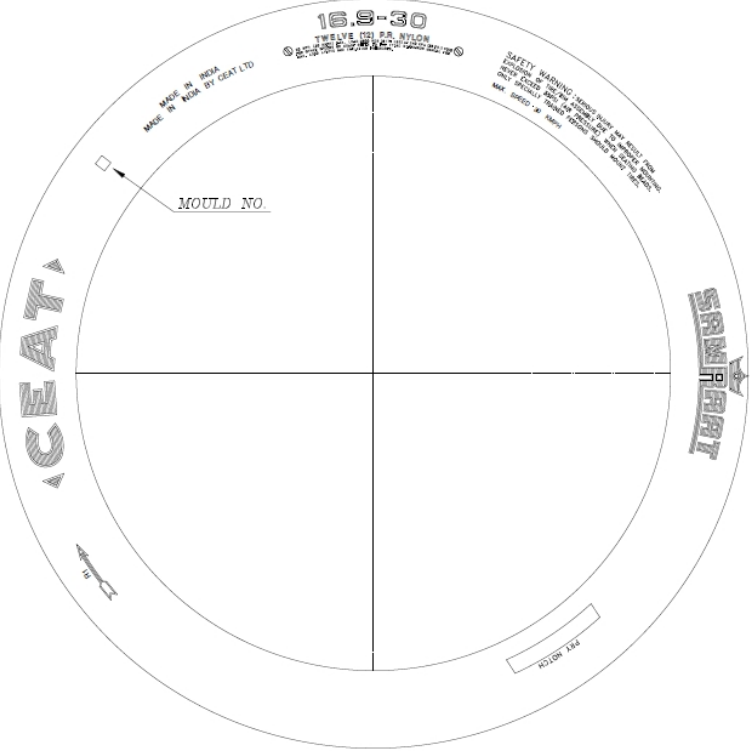
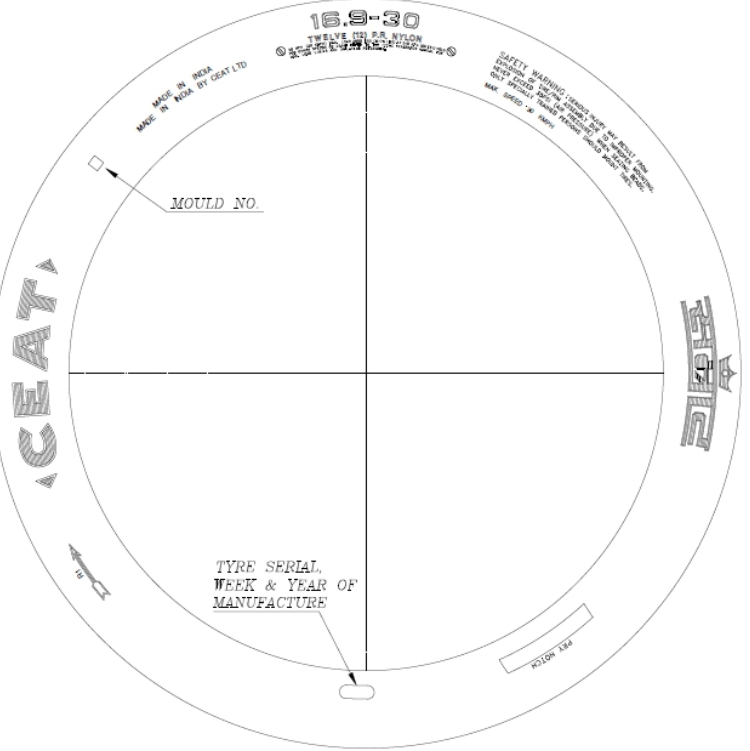
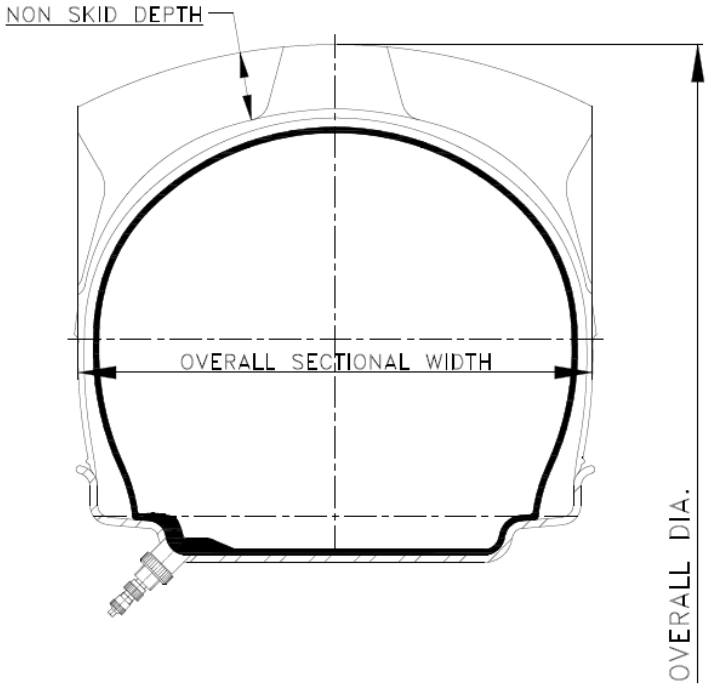


1	2	3	4	5	6	7	8																																																												
F			ASK, IF IN DOUBT  NON SERIAL SIDE		DO NOT SCALE  SERIAL SIDE		F																																																												
E	TREAD PATTERN		SIDE WALL MARKING DETAIL				E																																																												
D		<table><thead><tr><th>S.NO</th><th>DESCRIPTION</th><th>DETAILS</th></tr></thead><tbody><tr><td>1</td><td>TYRE SIZE</td><td>16.9-30</td></tr><tr><td>2</td><td>PATTERN NAME</td><td>SAMRAAT</td></tr><tr><td>3</td><td>PLY RATING</td><td>12 P.R.</td></tr><tr><td>4</td><td>THE CATEGORY OF USE</td><td>NORMAL</td></tr><tr><td>5</td><td>STRUCTURE</td><td>DIAGONAL</td></tr><tr><td>6</td><td>LOAD INDEX/SPEED SYMBOL</td><td>A6/30 KMPH MAX.(20 MPH)</td></tr><tr><td>7</td><td>T & RA CODE</td><td>R1</td></tr><tr><td>8</td><td>MAX.LOAD CARRYING CAPACITY (kg)</td><td>2800@A6</td></tr><tr><td>9</td><td>TUBE TYPE / TUBELESS</td><td>TUBETYPE</td></tr><tr><td>10</td><td>NORMAL / REINFORCED</td><td>NORMAL</td></tr><tr><td>11</td><td>OVERALL WIDTH (mm)</td><td>435 ±15</td></tr><tr><td>12</td><td>OVERALL DIAMETER (mm)</td><td>1490 ±20</td></tr><tr><td>13</td><td>TREAD WIDTH (mm)</td><td>383 ±10</td></tr><tr><td>14</td><td>ROLLING CIRCUMFERENCE (mm)</td><td>4455</td></tr><tr><td>15</td><td>STATIC LOADED RADIUS (mm)</td><td>695</td></tr><tr><td>16</td><td>NON SKID DEPTH</td><td>37.0 ±1</td></tr><tr><td>17</td><td>MEASURING RIM</td><td>W15 L x 30</td></tr><tr><td>18</td><td>INFLATION PRESSURE</td><td>240 kPa (35 PSI)</td></tr><tr><td>19</td><td>NO. OF LUGS</td><td>20</td></tr></tbody></table> SR.NO. REVISION DATE SIGN. DRAWN: KS CHECKED: VV/NP VERIFIED: AS 01.08.2017 01.08.2017 01.08.2017 CEAT DRG.NO.: COM-0178 SCALE: AS NOTED REV NO:-00 THIS DRG. IS THE SOLE PROPERTY OF CEAT LTD., HALOL. IT MUST NOT BE COPIED OR REPRODUCED IN ANY WAY OR MADE ACCESSIBLE TO THIRD PARTIES OR PUT TO ANY OTHER USE WITHOUT OBTAINING PRIOR WRITTEN CONSENT OF THE COMPANY. CEAT LTD., HALOL, GUJARAT-389 350. CLEAN ~ ROUGH M/C ▽ FINISH M/C ▽▽ FINE M/C ▽▽▽ GRIND TAP & HONE ▽▽▽ 16.9-30, 12 P.R. SAMRAAT TYRE DETAILS					S.NO	DESCRIPTION	DETAILS	1	TYRE SIZE	16.9-30	2	PATTERN NAME	SAMRAAT	3	PLY RATING	12 P.R.	4	THE CATEGORY OF USE	NORMAL	5	STRUCTURE	DIAGONAL	6	LOAD INDEX/SPEED SYMBOL	A6/30 KMPH MAX.(20 MPH)	7	T & RA CODE	R1	8	MAX.LOAD CARRYING CAPACITY (kg)	2800@A6	9	TUBE TYPE / TUBELESS	TUBETYPE	10	NORMAL / REINFORCED	NORMAL	11	OVERALL WIDTH (mm)	435 ±15	12	OVERALL DIAMETER (mm)	1490 ±20	13	TREAD WIDTH (mm)	383 ±10	14	ROLLING CIRCUMFERENCE (mm)	4455	15	STATIC LOADED RADIUS (mm)	695	16	NON SKID DEPTH	37.0 ±1	17	MEASURING RIM	W15 L x 30	18	INFLATION PRESSURE	240 kPa (35 PSI)	19	NO. OF LUGS	20	D
S.NO	DESCRIPTION	DETAILS																																																																	
1	TYRE SIZE	16.9-30																																																																	
2	PATTERN NAME	SAMRAAT																																																																	
3	PLY RATING	12 P.R.																																																																	
4	THE CATEGORY OF USE	NORMAL																																																																	
5	STRUCTURE	DIAGONAL																																																																	
6	LOAD INDEX/SPEED SYMBOL	A6/30 KMPH MAX.(20 MPH)																																																																	
7	T & RA CODE	R1																																																																	
8	MAX.LOAD CARRYING CAPACITY (kg)	2800@A6																																																																	
9	TUBE TYPE / TUBELESS	TUBETYPE																																																																	
10	NORMAL / REINFORCED	NORMAL																																																																	
11	OVERALL WIDTH (mm)	435 ±15																																																																	
12	OVERALL DIAMETER (mm)	1490 ±20																																																																	
13	TREAD WIDTH (mm)	383 ±10																																																																	
14	ROLLING CIRCUMFERENCE (mm)	4455																																																																	
15	STATIC LOADED RADIUS (mm)	695																																																																	
16	NON SKID DEPTH	37.0 ±1																																																																	
17	MEASURING RIM	W15 L x 30																																																																	
18	INFLATION PRESSURE	240 kPa (35 PSI)																																																																	
19	NO. OF LUGS	20																																																																	
C	TYRE,TUBE & RIM ASSEMBLY							C																																																											
B	<SC> :SIGNIFICANT CHARACTERISTICS ▽:CRITICAL CHARACTERISTICS <table><tr><td colspan="2">BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.</td><td colspan="2">MAHINDRA & MAHINDRA LIMITED</td></tr><tr><td colspan="2">UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989</td><td colspan="2">TRACTOR DIVISION</td></tr><tr><td colspan="2">DIMENSIONS</td><td colspan="2">KANDIVLI(EAST), MUMBAI 400 101, INDIA.</td></tr><tr><td colspan="2">E.R. / PROC.REQ.NO : ER19C0005491</td><td colspan="2">PART NO. : 007600487D1</td></tr><tr><td colspan="2">PART NAME : TYRE REAR (16.9 X 30)</td><td colspan="2">MATERIAL : ---</td></tr><tr><td colspan="2">HEAT TREATMENT : ---</td><td colspan="2">FIRST USED TRCR. MODEL H3 MSA</td></tr><tr><td colspan="2">SCALE 1:1</td><td colspan="2">SHEET 1 OF 1</td></tr><tr><td colspan="2">UNIT QTY. : ---</td><td colspan="2">WT : --- kg.</td></tr><tr><td colspan="2">ALL DIMENSIONS ARE IN mm.</td><td colspan="2">CHECK DRG WITH LATEST CHANGE No</td></tr></table> ER.NO. LET LOC REVISIONS DSNR CKR. APPR. DATE							BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.		MAHINDRA & MAHINDRA LIMITED		UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989		TRACTOR DIVISION		DIMENSIONS		KANDIVLI(EAST), MUMBAI 400 101, INDIA.		E.R. / PROC.REQ.NO : ER19C0005491		PART NO. : 007600487D1		PART NAME : TYRE REAR (16.9 X 30)		MATERIAL : ---		HEAT TREATMENT : ---		FIRST USED TRCR. MODEL H3 MSA		SCALE 1:1		SHEET 1 OF 1		UNIT QTY. : ---		WT : --- kg.		ALL DIMENSIONS ARE IN mm.		CHECK DRG WITH LATEST CHANGE No		B																							
BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.		MAHINDRA & MAHINDRA LIMITED																																																																	
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989		TRACTOR DIVISION																																																																	
DIMENSIONS		KANDIVLI(EAST), MUMBAI 400 101, INDIA.																																																																	
E.R. / PROC.REQ.NO : ER19C0005491		PART NO. : 007600487D1																																																																	
PART NAME : TYRE REAR (16.9 X 30)		MATERIAL : ---																																																																	
HEAT TREATMENT : ---		FIRST USED TRCR. MODEL H3 MSA																																																																	
SCALE 1:1		SHEET 1 OF 1																																																																	
UNIT QTY. : ---		WT : --- kg.																																																																	
ALL DIMENSIONS ARE IN mm.		CHECK DRG WITH LATEST CHANGE No																																																																	
A	PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD. COMPUTER GENERATED DRAWING DO NOT CHANGE MANUALLY IF IN DOUBT, ASK DO NOT SCALE DRG SIZE : A2							A																																																											
1	2	3	4	5	6	7	8																																																												